


TAMRON
SP 60-300_{mm} F/3.8-5.4
Model 23A



OWNER'S MANUAL

Thank you for selecting the Tamron 60–300mm F/3.8–5.6 zoom lens as the latest addition to your photographic equipment. Before using your new lens, please read the contents of this Owner's Manual thoroughly to become fully acquainted with the proper techniques that will give you the best results possible.

With proper handling and care, your Tamron lens will give you many years of beautiful and exciting pictures.

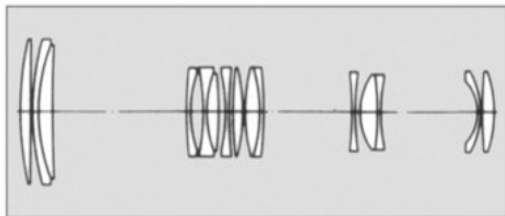

CONTENTS

| | |
|---|----|
| 1. NAMES OF PARTS | 3 |
| 2. SPECIFICATIONS | 4 |
| 3. FITTING/REMOVING THE ADAPTALL-2 MOUNT AND MOUNTING THE LENS TO YOUR CAMERA | 5 |
| 4. TAMRON ADAPTALL-2 CUSTOM MOUNTS | 9 |
| 5. OPERATING INSTRUCTIONS | 10 |
| (1) Focusing | 10 |
| (2) Checking of Depth of Field | 11 |
| (3) Zooming | 12 |
| (4) Macro Photography and Macro Magnification Scale | 13 |

| | |
|---|----|
| (5) Aperture Control | 14 |
| (6) AE Setting | 15 |
| (7) Infra-red Index | 15 |
| (8) Lens Hood | 16 |
| (9) Depth of Field Tables | 16 |
| (10) Shooting with an Electronic Flash | 17 |
| 6. DEPTH OF FIELD TABLES | 19 |
| 7. SPECIFICATIONS OF TAMRON LENSES | 23 |
| 8. CARING FOR YOUR LENS | 25 |


1. NAMES OF PARTS



2. SPECIFICATIONS

| | |
|----------------------------------|--|
| Focal Length | 60~300mm |
| Aperture Range | F/3.8~5.4 – 32, AE |
| Lens Construction | 11 groups, 15 elements |
| Coating | BBAR multiple-layer coating |
| Angle of View | 40°~8° |
| Minimum Focus from Film Plane | 1.9 m (6.2 ft.) (f=60mm–300mm) 0.3 m (11.8 in.) (f=60 mm) |
| Max. Reproduction Ratio | 1:1.55 (f=60 mm M.O.D. 0.3 m) |
| Zooming System | One-touch, direct extention |
| Lens Accessory Size | 62mm |
| Overall Length | 166mm (w/Mount for Nikon) (6.5") |
| Max. Diameter | 68mm (2.7") |
| Weight | 870g (30.7 oz.) |
| Lens Hood | Bayonet type |


3. FITTING/REMOVING THE ADAPTALL-2 MOUNT AND MOUNTING THE LENS TO YOUR CAMERA

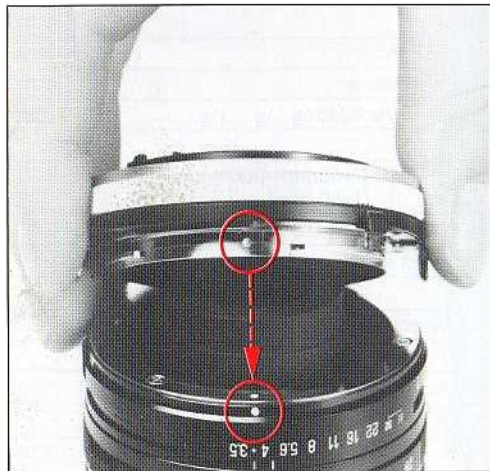

This lens employs the Tamron Adaptall Interchangeable Mount system. The lens can be fitted to most of the SLR cameras on the market. Please read the instruction manual enclosed with the Adaptall Interchangeable Mount, so that the proper fitting is made.

1. Fitting the Mount to Your Lens


- (1) Align the green dot on the bayonet of the custom mount with the matching green dot on the lens barrel and turn the mount clockwise for approximately 2cm until the mount is locked into the proper position.

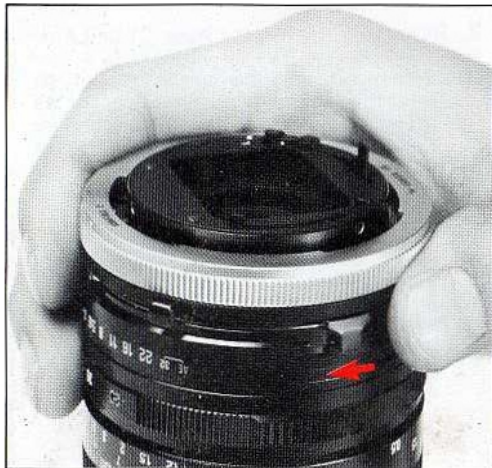

- (2) The custom mounts for cameras featuring TTL light-metering, AE and automatic diaphragm control, are provided with a meter coupling lever which activates the control ring. After fitting the custom mount, move the meter coupling lever so that it engages in the slot provided on the lens, and the exposure control mechanism of the lens will crosscouple to the camera's system.


NOTE: Some mounts have two coupling levers on both sides, so when fitting the mount of the lens, engage the two coupling levers in the corresponding slots on both sides of the lens.

FITTING/REMOVING THE ADAPTALL-2 MOUNT AND MOUNTING THE LENS TO YOUR CAMERA

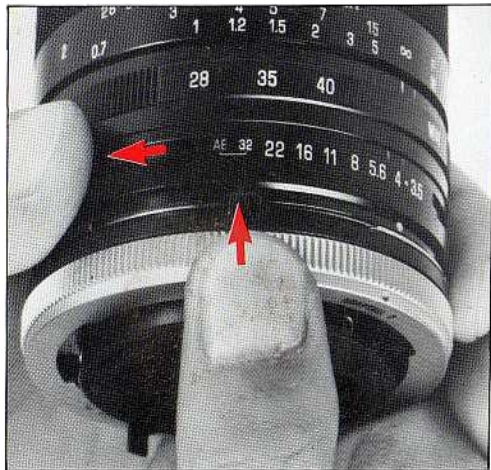

2. Removing the Mount from Your Lens

- (1) Before removing the custom mount, be sure to move the aperture ring to the maximum opening. When the aperture ring is set at the AE position, depress the AE lock button to release the AE setting and then move the aperture control ring to the maximum opening.
- (2) An L-shaped mount release lever is provided directly opposite the aperture indicator which, when depressed, will release the mount. Therefore, while keeping the L-shaped mount release lever depressed, turn the custom mount counter-clockwise all the way until it stops and then lift the mount off the lens.

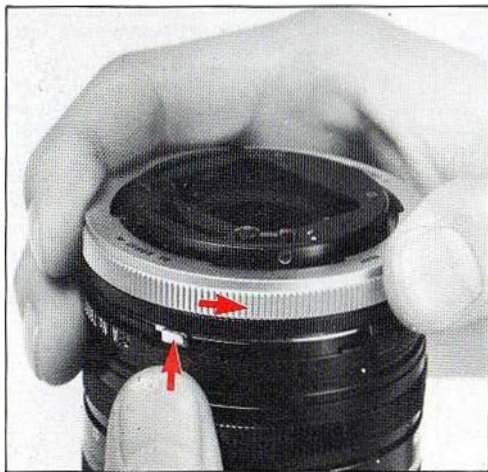

3. Mounting the Lens to Your Camera

Your Tamron lens with the Adaptall custom mount can be fitted to your camera in the same manner as the camera manufacturer's lenses. When fitting the lens and adapter onto a camera, be sure to move the aperture control ring of the lens to the maximum opening.

4. TAMRON ADAPTALL-2 CUSTOM MOUNTS

| Mount | Mount Type | Adaptall lenses | SP/ Adaptall-2 lenses |
|---|---------------|-----------------|-----------------------|
| For Canon | Bayonet type | X | ○ |
| For Minolta MD | Bayonet type | X | ○ |
| For Konica AR | Bayonet type | X | ○* |
| For Contax/Yashica | Bayonet type | X | ○ |
| For Olympus | Bayonet type | ○ | ○ |
| For Pentax K | Bayonet type | ○ | ○ |
| For Pentax ES | Screw-in type | ○ | ○* |
| For Pentax Universal | Screw-in type | ○ | ○ |
| For Nikon AI/E | Bayonet type | X | ○ |
| For Nikon AI | Bayonet type | ○▲1 | ○▲1 |
| For Fujica AX | Bayonet type | X | ○ |
| For Fujica ST | Screw-in type | ○ | ○ |
| For Mamiya SX | Screw-in type | ○ | ○ |
| For Rollei | Bayonet type | ○ | ○ |
| For Topcon | Bayonet type | ○ | ○* |
| For Praktica-B | Bayonet type | ○▲2 | ○ |
| For Praktica-LLC | Screw-in type | ○ | ○ |
| For "C" mount for CCTV/VTR cameras and 16mm movie cameras | | ○ | ○ |
| For "MS" mount for CCTV/VTR cameras | | ○ | ○ |

* Mount requires initial maximum aperture adjustment.

⦿ Due to small rear aperture, this mount will not accept the SP 70-210mm F/3.5-4 (52A), SP 90mm F/2.5 (52B), SP flat-field 2X tele-converter (01F), Adaptall-2 80-210mm F/3.8-4 (03A) and Adaptall-2 75-250mm F/3.8-4.5 (04A & 104A).

- ▲1 Will not synchronize with Auto Mode of designated speed light of Nikon EM.
- ▲2 Program AE system and AE system of shutter speed priority will not work.

5. OPERATING INSTRUCTIONS




(1) Focusing

This lens features a one-touch zooming system, which means you can focus and zoom with one control ring. Focus by rotating the operating ring until the subject appears sharp in the viewfinder. Focusing is continuous from infinity to 1.9m throughout the entire focal length range. Almost life-size macro photography is possible at f=60mm. (For details, please refer to (4) MACRO OPERATION.)

It is easier to focus at the telephoto end of the zoom range due to the shallower depth of field.

The position of the infinity mark (∞) of this lens is shifted slightly to the positive side to enable focus adjustment even when focus shift is caused due to temperature changes. The shift range is denoted by an L-shaped line. Be sure to check the focus through the viewfinder even when you shoot at infinity.

OPERATING INSTRUCTIONS

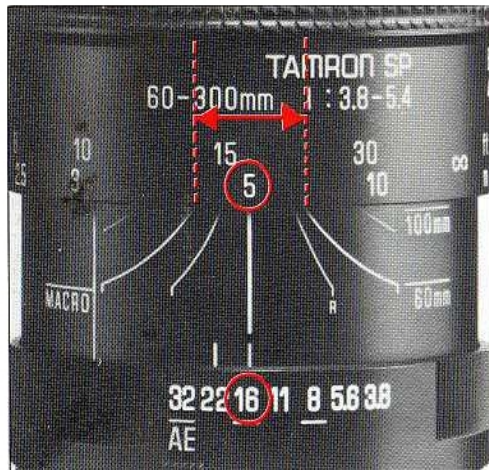


(2) Checking Depth of Field

To check depth-of-field, this lens has depth-of-field scales for apertures F/8, F/16 and F/32. The colors of the depth-of-field scales correspond to the colors of the lines under the aperture scales. The index for infra-red photography (red line marked R) can also be used as a depth-of-field scale at F/8.

Check depth-of field as follows:

Example: When you shoot at $f=100\text{mm}$, F/16, at a distance of 5 meters:

- (I) Set the aperture control ring to F/16.
- (II) Set the distance to 5 meters.
- (III) Read the value between the depth-of-field scale (two yellow lines in this case).

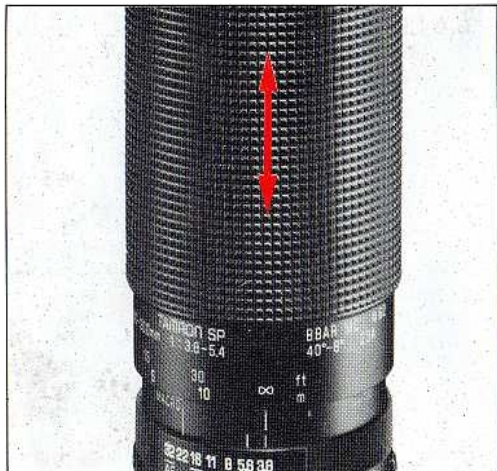

In this case, the depth-of-field is from 4 to 7 meters (13.1 to 23.0).


For depth-of-field at other apertures or more precise ones, please look at the depth-of-field tables on page-19.

When you want to check depth-of-field through the viewfinder of your camera, push the depth-of-field preview button on your camera (in case of Olympus cameras, push the built-in preview lever on the mount).

(3) Zooming

The focal length can be changed by pulling or pushing the operating ring, steplessly increasing or decreasing the size of the subject. Select the desired subject size and perspective while looking through the viewfinder.

OPERATING INSTRUCTIONS

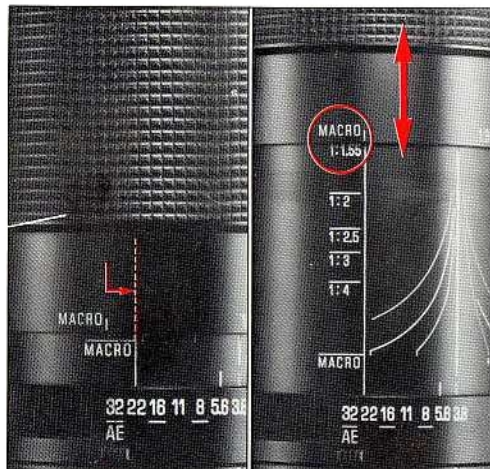

(4) Macro Operation and Macro Magnification Ratio

With this lens, you can focus down to 0.3 meters (11.8 in.) at the 60mm focal length setting for an almost life-size 1:1.55 maximum magnification ratio. First, set the operating ring to the $f=60\text{mm}$ setting and turn the ring to 1.9m minimum object distance setting. Pull the operating ring further and it will shift by about 1mm. Then, rotate the ring so that the orange lines on the right of the MACRO marks on the operating ring and the lens barrel meet together. Push the operating ring forward towards the object and you can see macro magnification scales, which show the macro magnification ratios at each setting. In this operation the object distance can be changed steplessly from 1.9m so the image will never disappear.

When you want to return to the normal mode



after macro operation, pull the operating ring towards the camera body and rotate it counter-clock-wise.

You can zoom when the operating ring goes past 1.9m, the minimum object distance in the normal mode.


In macro photography, the operating ring will only shift forwards or backwards.

(5) Aperture Control

Rotate the aperture control ring and set the required aperture against the index line. In fact, there are two aperture indexes, because the maximum aperture of this lens changes at the wideangle and telephoto ends. Set the desired f-stop to the orange line at the wideangle position (f=60mm) or to the blue line at the telephoto position (f=300mm).

(Intermediate click stops are provided from F/3.8 to F32)

OPERATING INSTRUCTIONS

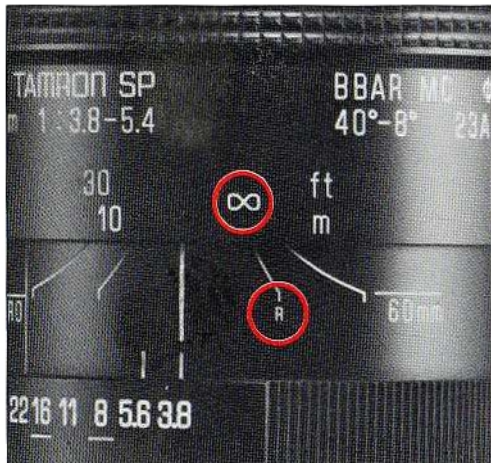

(6) AE Setting

When using your lens on cameras which incorporate a shutter priority automatic mode, turn the aperture control ring on your lens to the AE position which also serves F/32 when the lens is used on other cameras.

(7) Infra-Red Index

Since the focal point shifts in infra-red photography, it is necessary to correct the focus. Focus in the normal manner, and shift the indicated distance to the red line marked "R".



(8) Lens Hood

A bayonet type lens hood is supplied. The use of this lens hood is always recommended since it prevents unwanted light from striking the lens and causing image degrading flare, which results in poor print quality.


(9) Depth of Field Tables

Example of the use of depth of field tables:

Shooting at a distance of 5m (16.4 ft) with the aperture set at F/5.6 at a focal length of 135mm.

Read off the depth of field from where the F/5.6 column intersects with the 5m (16.4 ft) distance on the horizontal row. In this case the depth of field is from 4.78–5.24m.


| Focal Length | Aperture (F) | 4.7 | 5.6 | 8 | |
|--------------|--------------|-------------|-------------|-------------|------|
| | Distance (m) | | | | |
| f = 135mm | 1.90 | 1.88 – 1.92 | 1.87 – 1.93 | 1.86 – 1.94 | 1.1 |
| | 2.00 | 1.97 – 2.03 | 1.97 – 2.03 | 1.96 – 2.05 | 1.2 |
| | 3.00 | 2.94 – 3.07 | 2.92 – 3.08 | 2.89 – 3.12 | 2.3 |
| | 5.00 | 4.81 – 5.20 | 4.78 – 5.24 | 4.69 – 5.36 | 4.5 |
| | 10.00 | 9.24 – 10.9 | 9.11 – 11.1 | 8.78 – 11.6 | 8.1 |
| | 15.00 | 12.1 – 17.1 | 11.7 – 17.1 | 11.4 – 18.1 | 11.8 |

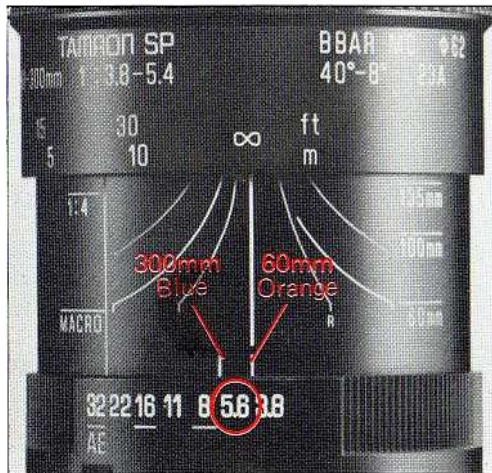

(10) Notes: Shooting with an electronic flash

This lens features a variable aperture design, with the maximum aperture changing about one stop between the wideangle and telephoto ends of the zoom range (F/3.8–F/5.4). When you shoot in the normal mode using a TTL light metering mode, the aperture will automatically be adjusted to the amount of the incident light. When shooting with an electronic flash, adjust the aperture by following the procedure below.

1. Set the f-stop (obtained from the guide number of the flash) to the orange aperture index line at the 60mm wideangle end or the blue aperture index line at the 300mm telephoto end.
2. When you shoot at an intermediate focal length setting or while zooming, set the

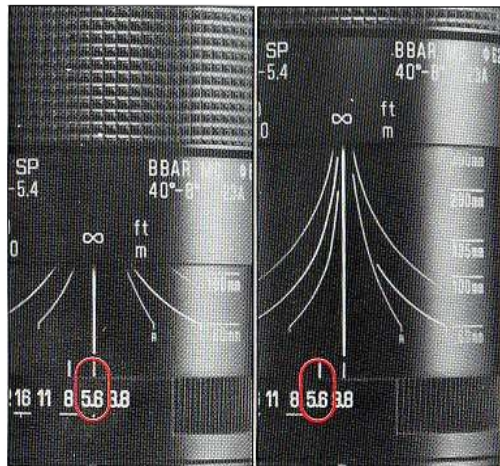

f-stop obtained from the guide number in the middle of the two index lines.

3. When shooting with the type of auto flash that controls the f-stop with a signal from the camera, use the flash in a manual mode.
4. When you use film with limited latitude such as reversal film, at f=60–100mm, set the f-stop to the blue index line. At f=100–200mm, to the middle of the two lines and f=200mm and over, to the orange index line. This way, you will get the correct exposure.

NOTE: When shooting with cameras that control the exposure during exposure itself, no adjustment is needed.

6. DEPTH OF FIELD TABLES

| Focal Length | Aperture (F) Distance (m) | 3.8 | 4 | 5.6 | 8 | 11 | 16 | 22 | 32 |
|--------------|------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|----------------|
| | | | | | | | | | |
| f = 60mm | 1.90 | 1.81 ~ 2.00 | 1.81 ~ 2.01 | 1.77 ~ 2.05 | 1.72 ~ 2.12 | 1.66 ~ 2.22 | 1.58 ~ 2.41 | 1.48 ~ 2.70 | 1.35 ~ 3.36 |
| | 2.00 | 1.90 ~ 2.11 | 1.89 ~ 2.12 | 1.86 ~ 2.17 | 1.80 ~ 2.26 | 1.74 ~ 2.37 | 1.64 ~ 2.59 | 1.54 ~ 2.92 | 1.39 ~ 3.73 |
| | 3.00 | 2.76 ~ 3.29 | 2.75 ~ 3.31 | 2.66 ~ 3.45 | 2.53 ~ 3.69 | 2.40 ~ 4.05 | 2.20 ~ 4.82 | 2.00 ~ 6.30 | 1.75 ~ 13.1 |
| | 5.00 | 4.32 ~ 5.95 | 4.29 ~ 6.01 | 4.06 ~ 6.53 | 3.76 ~ 7.54 | 3.44 ~ 9.34 | 3.03 ~ 15.6 | 2.64 ~ 87.5 | 2.19 ~ ∞ |
| | 10.00 | 7.51 ~ 15.1 | 7.41 ~ 15.5 | 6.72 ~ 19.8 | 5.90 ~ 34.6 | 5.12 ~ 54.0 | 4.21 ~ ∞ | 3.48 ~ ∞ | 2.71 ~ ∞ |
| | 20.00 | 11.9 ~ 64.4 | 11.6 ~ 73.0 | 9.99 ~ ∞ | 8.24 ~ ∞ | 6.77 ~ ∞ | 5.23 ~ ∞ | 4.12 ~ ∞ | 3.06 ~ ∞ |
| | 70.00 | 20.4 ~ ∞ | 19.7 ~ ∞ | 15.3 ~ ∞ | 11.5 ~ ∞ | 8.79 ~ ∞ | 6.33 ~ ∞ | 4.75 ~ ∞ | 3.38 ~ ∞ |
| | 200.0 | 25.1 ~ ∞ | 24.0 ~ ∞ | 17.8 ~ ∞ | 12.8 ~ ∞ | 9.52 ~ ∞ | 6.69 ~ ∞ | 4.95 ~ ∞ | 3.48 ~ ∞ |
| | ∞ | 28.6 ~ ∞ | 27.2 ~ ∞ | 19.4 ~ ∞ | 13.7 ~ ∞ | 9.97 ~ ∞ | 6.91 ~ ∞ | 5.06 ~ ∞ | 3.53 ~ ∞ |

| Focal Length | Aperture (F) Distance (m) | 4.7 | 5.6 | 8 | 11 | 16 | 22 | 32 |
|--------------|------------------------------|-----------------|-----------------|----------------|----------------|----------------|----------------|----------------|
| | | | | | | | | |
| f = 135mm | 1.90 | 1.88 ~ 1.92 | 1.87 ~ 1.93 | 1.86 ~ 1.94 | 1.85 ~ 1.96 | 1.82 ~ 1.98 | 1.79 ~ 2.02 | 1.75 ~ 2.08 |
| | 2.00 | 1.97 ~ 2.03 | 1.97 ~ 2.03 | 1.96 ~ 2.05 | 1.94 ~ 2.06 | 1.91 ~ 2.10 | 1.88 ~ 2.13 | 1.83 ~ 2.20 |
| | 3.00 | 2.94 ~ 3.07 | 2.92 ~ 3.08 | 2.89 ~ 3.12 | 2.85 ~ 3.16 | 2.79 ~ 3.24 | 2.72 ~ 3.34 | 2.61 ~ 3.53 |
| | 5.00 | 4.81 ~ 5.20 | 4.78 ~ 5.24 | 4.69 ~ 5.36 | 4.58 ~ 5.50 | 4.42 ~ 5.77 | 4.23 ~ 6.12 | 3.96 ~ 6.82 |
| | 10.00 | 9.24 ~ 10.9 | 9.11 ~ 11.1 | 8.78 ~ 11.6 | 8.39 ~ 12.4 | 7.83 ~ 13.9 | 7.24 ~ 16.3 | 6.43 ~ 22.8 |
| | 20.00 | 17.1 ~ 24.0 | 16.7 ~ 25.0 | 15.6 ~ 28.0 | 14.4 ~ 33.0 | 12.7 ~ 46.8 | 11.2 ~ 94.7 | 9.36 ~ ∞ |
| | 70.00 | 43.8 ~ 174.0 | 40.9 ~ 244.0 | 34.7 ~ ∞ | 29.2 ~ ∞ | 23.1 ~ ∞ | 18.5 ~ ∞ | 13.9 ~ ∞ |
| | 200.0 | 73.7 ~ ∞ | 65.8 ~ ∞ | 51.1 ~ ∞ | 40.0 ~ ∞ | 29.3 ~ ∞ | 22.2 ~ ∞ | 15.9 ~ ∞ |
| | ∞ | 116.0 ~ ∞ | 97.7 ~ ∞ | 68.5 ~ ∞ | 49.8 ~ ∞ | 34.3 ~ ∞ | 25.0 ~ ∞ | 17.2 ~ ∞ |

DEPTH OF FIELD TABLES

| Focal Length | Aperture (F) | 5.2 | 5.6 | 8 | 11 | 16 | 22 | 32 |
|--------------|--------------|------------------|------------------|----------------|----------------|----------------|---------------|---------------|
| | Distance (m) | | | | | | | |
| f = 200mm | 1.90 | 1.89~ 1.91 | 1.89~ 1.91 | 1.88~ 1.92 | 1.87~ 1.93 | 1.86~ 1.94 | 1.85~ 1.95 | 1.83~ 1.98 |
| | 2.00 | 1.99~ 2.01 | 1.99~ 2.01 | 1.98~ 2.02 | 1.97~ 2.03 | 1.96~ 2.04 | 1.94~ 2.06 | 1.92~ 2.09 |
| | 3.00 | 2.97~ 3.03 | 2.96~ 3.04 | 2.95~ 3.05 | 2.93~ 3.07 | 2.90~ 3.11 | 2.87~ 3.15 | 2.81~ 3.22 |
| | 5.00 | 4.90~ 5.10 | 4.90~ 5.11 | 4.85~ 5.16 | 4.80~ 5.22 | 4.71~ 5.32 | 4.62~ 5.46 | 4.46~ 5.69 |
| | 10.00 | 9.60~ 10.4 | 9.57~ 10.5 | 9.40~ 10.7 | 9.20~ 11.0 | 8.87~ 11.5 | 8.51~ 12.1 | 7.98~ 13.4 |
| | 20.00 | 18.4~ 21.9 | 18.3~ 22.0 | 17.7~ 23.0 | 17.0~ 24.4 | 15.9~ 27.1 | 14.7~ 31.2 | 13.2~ 41.8 |
| | 70.00 | 53.8~ 100.0 | 52.9~ 104.0 | 47.8~ 131.0 | 42.8~ 193.0 | 36.3~ 974.0 | 30.8~ ∞ | 24.6~ ∞ |
| | 200.0 | 107.0~ 1481.0 | 104.0~ 2920.0 | 85.9~ ∞ | 70.7~ ∞ | 54.7~ ∞ | 43.0~ ∞ | 31.7~ ∞ |
| | ∞ | 231.0~ ∞ | 214.0~ ∞ | 150.0~ ∞ | 109.0~ ∞ | 75.1~ ∞ | 54.6~ ∞ | 37.6~ ∞ |

| Focal Length | Aperture (F) | 5.4 | 5.6 | 8 | 11 | 16 | 22 | 32 |
|--------------|--------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|--------------------|
| | Distance (m) | | | | | | | |
| f = 300mm | 1.90 | 1.89 ~ 1.91 | 1.89 ~ 1.91 | 1.89 ~ 1.91 | 1.89 ~ 1.91 | 1.88 ~ 1.92 | 1.88 ~ 1.92 | 1.87 ~ 1.93 |
| | 2.00 | 1.99 ~ 2.01 | 1.99 ~ 2.01 | 1.99 ~ 2.01 | 1.99 ~ 2.01 | 1.98 ~ 2.02 | 1.97 ~ 2.03 | 1.96 ~ 2.04 |
| | 3.00 | 2.98 ~ 3.02 | 2.98 ~ 3.02 | 2.98 ~ 3.02 | 2.97 ~ 3.03 | 2.95 ~ 3.05 | 2.94 ~ 3.06 | 2.91 ~ 3.09 |
| | 5.00 | 4.95 ~ 5.05 | 4.95 ~ 5.05 | 4.93 ~ 5.07 | 4.91 ~ 5.09 | 4.87 ~ 5.14 | 4.82 ~ 5.19 | 4.74 ~ 5.29 |
| | 10.00 | 9.81 ~ 10.2 | 9.81 ~ 10.2 | 9.72 ~ 10.3 | 9.63 ~ 10.4 | 9.46 ~ 10.6 | 9.28 ~ 10.8 | 8.98 ~ 11.3 |
| | 20.00 | 19.2 ~ 20.8 | 19.2 ~ 20.8 | 18.9 ~ 21.2 | 18.5 ~ 21.7 | 17.9 ~ 22.6 | 17.3 ~ 23.8 | 16.2 ~ 26.0 |
| | 70.00 | 61.5 ~ 81.3 | 61.2 ~ 81.8 | 58.0 ~ 88.2 | 54.5 ~ 97.7 | 49.6 ~ 119.0 | 44.7 ~ 162.0 | 38.4 ~ 400.0 |
| | 200.0 | 143.0 ~ 333.0 | 141.0 ~ 341.0 | 126.0 ~ 490.0 | 110.0 ~ 1071.0 | 91.7 ~ ∞ | 76.2 ~ ∞ | 59.5 ~ ∞ |
| | ∞ | 500.0 ~ ∞ | 482.0 ~ ∞ | 338.0 ~ ∞ | 246.0 ~ ∞ | 169.0 ~ ∞ | 123.0 ~ ∞ | 84.4 ~ ∞ |

7. SPECIFICATIONS OF TAMRON LENSES


| Model No. Specification | 13A | 17A | 27A | 01A | 28A | 22A | 20AB | 26A | 19AH | 103A | 104A |
|-------------------------------------|-----------------------------|------------|----------------|----------------|--------------|----------------|------------|----------------|---------------------------------|---------------|----------------|
| Focal Length | 24-48mm | 35-70mm | 28-60mm | 35-80mm | 28-135mm | 35-135mm | 30-150mm | 35-210mm | 70-210mm | 80-210mm | 75-250mm |
| Max. Aperture | F/3.5-3.8 | F/3.5 | F/3.5-4.2 | F/2.8-3.8 | F/4-4.5 | F/3.5-4.2 | F/3.5 | F/3.5-4.2 | F/3.5 | F/3.8-4 | F/3.8-4.5 |
| Angle of View | 84°-46° | 61°-34° | 75°-30.5° | 64°-30° | 75°-18° | 63°-18° | 34°-16° | 62°-11° | 34.5°-12° | 30°-11° | 32°-10° |
| Lens Construction | 9/10 | 7/7 | 8/8 | 8/9 | 12/17 | 12/14 | 12/13 | 12/16 | 11/15 | 10/13 | 10/13 |
| Coating | BBAR Multiple Layer Coating | | | | | | | | | | |
| Minimum Focus from Film Plane | 0.6m | 0.25m | 0.36m | 0.27m | 2.0m | 1.9m | 0.7m | 1.6m | 0.85m | 0.9m | 1.2m |
| Max. Reproduction Ratio | - | 1:2.8 | 1:3.4 | 1:2.5 | 1:4 | 1:4 | 1:3 | 1:3.6 | 1:2.66 | 1:2.3 | 1:3.4 |
| Aperture Range | 3.5/3.8-32, AE | 3.5-32, AE | 3.5/4.2-32, AE | 2.8/3.8-32, AE | 4/4.5-32, AE | 3.5/4.2-32, AE | 3.5-32, AE | 3.5/4.2-22, AE | 3.5-32, AE | 3.8/4-32, AE | 3.8/4.5-32, AE |
| Lens Accessory Size | 77mm | 55mm | 67mm | 67mm | 67mm | 67mm | 49mm | 67mm | 62mm | 58mm | 62mm |
| Length at ∞ (W/Nikon Mount) (mm) | 61 [65.5] | 55 [59.5] | 82 [86.5] | 72 [76.5] | 106 [110.5] | 105 [109.5] | 99 [103.5] | 121.2 [125.7] | 150 [154.5] | 137.2 [142.2] | 172 [175.5] |
| Max. Diameter (mm) | 64.5 | 65.6 | 70 | 64.5 | 70 | 72.4 | 64.5 | 73 | 71 | 65 | 71 |
| Weight (g) | 340 | 330 | 480 | 380 | 715 | 425 | 459 | 875 | 860 | 634 | 856 |
| Lens Hood | Bayonet | Push-on | Bayonet | Push-on | Bayonet | Bayonet | Built-in | Bayonet | Bayonet type coupled to zooming | Screw-in | Built-in |

| 23A | 05A | 31A | 51B | 01B | 02B | 02B | 03B | 04B | 107B | 54B | 06B | 55BB | 01F |
|-----------------------------|-------------|---------------------|------------|------------|------------|------------|------------|-------------|----------------------|-------------|-----------------------|-----------------------|-----------|
| 60-300mm | 70-350mm | 200-500mm | 17mm | 24mm | 28mm | 30mm | 135mm | 200mm | 300mm | 399mm | 350mm | 500mm | |
| F/3.6-5.4 | F/4.5 | F/5.6 | F/3.5 | F/2.5 | F/2.5 | F/2.5 | F/2.5 | F/3.5 | F/2.8 | F/2.8 | F/5.6 | F/8 | |
| 40°-86° | 34°-7° | 12.5°-5° | 104° | 84° | 75° | 27° | 18° | 12° | 8° | 8° | 7.3° | 5° | - |
| 11/15 | 13/15 | 10/14 | 10/12 | 9/10 | 7/7 | 6/8 | 4/4 | 5/5 | 6/7 | 5/5 | 4/7 | 4/7 | 5/6 |
| BBAR Multiple Layer Coating | | | | | | | | | | | | | |
| 1.1m | 2.5m | 2.5m | 0.25m | 0.25m | 0.25m | 0.39m | 1.2m | 1.7m | 3.0m | 1.4m | 1.1m | 1.7m | - |
| 1 : 1.55 | - | 1 : 3.52 | - | - | 1 : 5.8 | 1 : 2 | 1 : 7 | 1 : 6.9 | - | 1 : 3.3 | 1 : 2.5 | 1 : 3 | - |
| 3.6/5.4-32, AL | 4.5-32, AL | 5.8-32 | 3.5-22, AE | 2.4-22, AL | 2.5-32, AE | 2.5-32, AE | 2.5-32, AE | 3.5-32, AL | 2.8-32, AF | 5.6-32, AE | - | - | - |
| 62mm | 82mm | 85mm 43mm (rear) | Built-in | 50mm | 49mm | 49mm | 58mm | 58mm | 112mm 43mm (rear) | 58mm | 82mm 30.5mm (rear) | 82mm 30.5mm (rear) | - |
| 161.5 [198] | 274 [278.5] | 355 [369.5] | 43 [47.5] | 48 [42.5] | 35 [37.5] | 66 [70.5] | 29.5 [84] | 108 [112.5] | 199 [203.5] | 163.5 [163] | 74.5 [79] | 87 [91.5] | 42.5 [47] |
| 60 | 90 | 105 | 30 | 64.5 | 64.5 | 64.5 | 64.5 | 68 | 112.5 | 64.5 | 86 | 84 | 64.5 |
| 870 | 2,373 | 2,789 | 220 | 230 | 180 | 420 | 410 | 540 | 2,071 | 610 | 522 | 525 | 250 |
| Bayonet | Built-in | Built-in | Push-in | Screw-in | Screw-in | Screw-in | Built-in | Built-in | Bayonet | Built-in | Screw-in | Screw-in | |

* Specifications and availability are subject to change without notice.

8. CARING FOR YOUR LENS


1. Avoid touching the lens surface. Use a photographic brush or blower to remove dust from the lens surface. When not using the lens, put a lens cap on for protection.
2. Use a lens cleaning tissue or lintless cloth with a drop of cleaning solution to clean fingerprints or dirt on the lens surface with a rotary motion from center to edge. Use a silicon cloth to clean your lens barrel only.
3. When carrying a lens on your camera without a camera case, hang it from your shoulder with the lens towards your body to protect it from objects which it might hit.



4. When storing your lens in a lens case, turn the focusing ring so that the ∞ mark on the distance scale is aligned to the index line. Also store it with a packet of desiccant



5. Fungus is an enemy of your lens. Clean the lens after shooting at seaside or in a humid place. Store your lens in a clean, cool and dry place. If you find fungus on your lens, please consult a repair shop or nearby photographic store.



TAMRON International Service

Should any TAMRON product require service, TAMRON's international service is available in over 48 nations worldwide.

TAMRON CO.,LTD.

Manufacturers of lenses for photographic, industrial, laboratory, video, and scientific applications.

1385 Hasunuma Omiya, Saitama, Japan

Tel: (0486)84-9111 Telex: J23977 TAMRON Fax: (0486)83-8289

Cable: TAMRONTAISEI OMIYA

cleaned by Radovan

AllPhotoLenses Exclusive

英 **AllPhotoLenses**

8703U Printed in Japan